



WWW.BARRYIND.COM

# A0200-20-3X



BeO

2 dB


FLANGED ATTENUATOR

### Features:


- ◆ BeO Material
- ◆ DC - 3 GHz Performance
- ◆ 20 Watt Input Power
- ◆ Flange Mount

### General Description:


The A0200-20-3X is a flanged 2 dB, BeO attenuator. It has an input power of 20 watts, while maintaining a constant flange temperature of 100°C. It offers a frequency range from DC to 3 GHz.

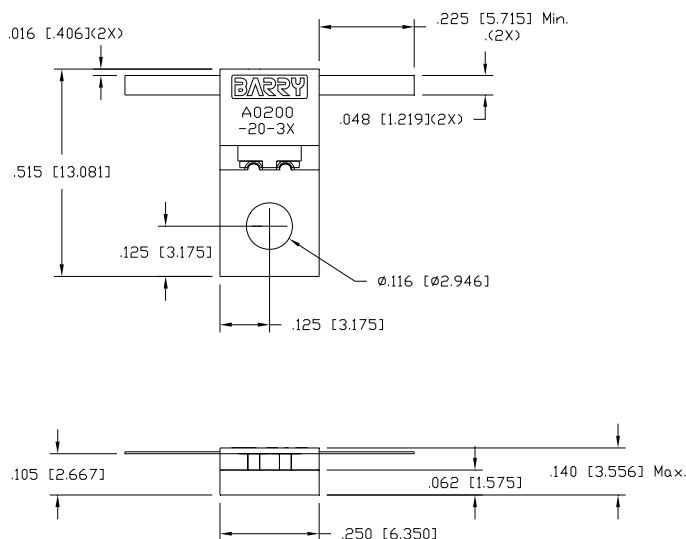

Dimensions in inches [mm]  
Tolerance ± .010 [.254]  
unless otherwise stated  
**UNIT CAN BE MOUNTED  
IN EITHER DIRECTION**

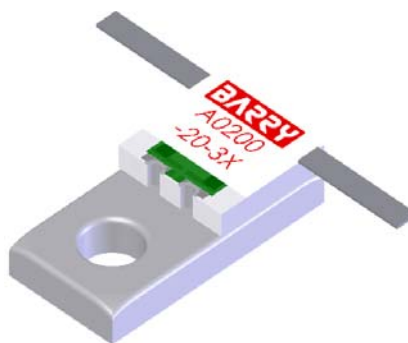

DERATING CURVE:



Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		3	GHz
Input Return Loss	17			dB
Output Return Loss	17			dB
Attenuation	1	2	3	dB
Input Power			20	Watts
Flange Temperature			100	°C
Pulse Width			50	Microseconds
Peak Power			600	Watts
Duty Cycle			0.5	%

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
06/30/08	03/04/10	B