


AA0150-100-9X Features:


- Flange Mount
- RoHS Compliant
- Customer Defined Testing Available
- High Rated Power
- Covered Resistive Element

AA0150-100-9X Parameters:


Nominal Attenuation:	1.5dB	
Operating Frequency:	DC - 2.5GHz	
Attenuation Tolerance:	±0.5dB (DC - 1GHz)	±1dB (>1GHz - 2.5GHz)
Return Loss (Typical)*:	28dB or Better (DC - 1GHz)	15dB or Better (>1GHz - 2.5GHz)
Rated Power:	100W**	
Impedance:	50Ω	
Resistor Construction:	Thick Film on AIN	
Flange Construction:	Silver Plated Copper	
Lead Construction:	Silver Plated Copper	
Operating Temperature:	-55 to +150°C	

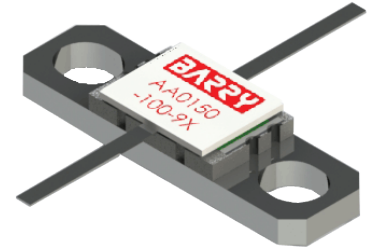

AA0150-100-9X Power Derating Curve



AA0150-100-9X Dimensions:

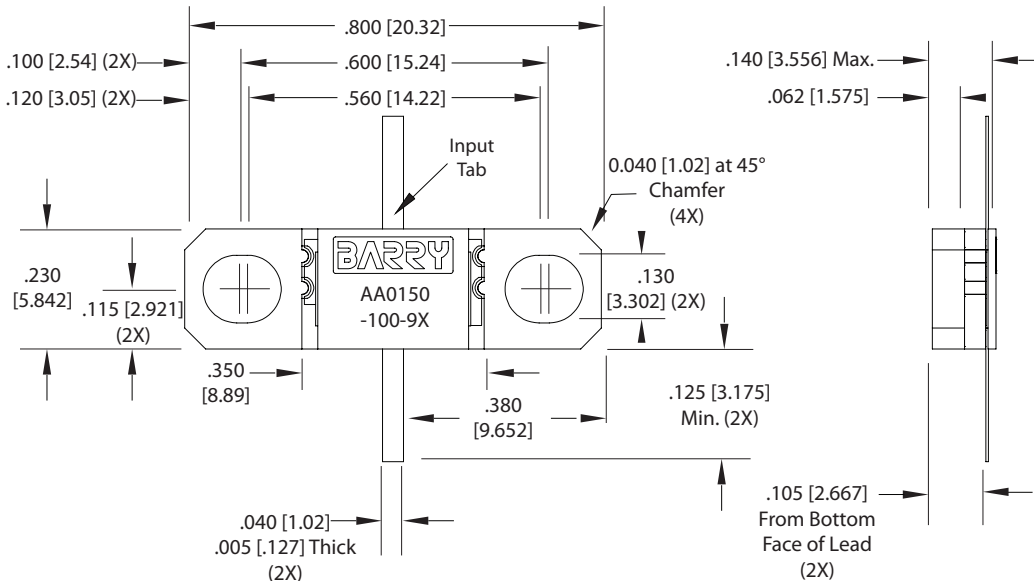

Dimensions in inches [mm]
Tolerance is ± 0.010 [0.254]
unless otherwise stated

* In a matched, continuous 50Ω system with proper workmanship
** Rating based on ≤100°C constant baseplate temperature

Ordering Information:

AA	0150	-	100	-	9X
Prefix for Flanged Attenuator with AIN Substrate	Value Code 0150 - 1.5dB		Rated Power 100 - 100W		Assigned by Factory

Barry Industries reserves the right to change part number and/or process without notification.



ORIG.	REV.	No.
OCT 1 2008	DEC 2 2015	B
PAGE 1 OF 2		

AA0150-100-9X Reliability Data:

Parameter:	Test Condition:	Results:
Short Time Overload	Apply 1.1x Rated Power for 5 Seconds.	≤ 5.0% Resistance Shift
Rated Load Life	Apply 1/2 Power Under 40°C ±2°C 90 Minutes on/ 30 Minutes off. Repeat for 100 hours	≤ 5.0% Resistance Shift
Moisture Resistance	MIL-PRF-55342 para.4.8.9 95% RH, 25°C - 65°C	≤ 5.0% Resistance Shift
Resistance to Soldering Heat (Lead)	MIL-STD-202 Method 210 Test Condition "A"	≤ 5.0% Resistance Shift
Resistance to Soldering Heat (Assembly)	MIL-STD-202 Method 210 Test Condition "J"	≤ 5.0% Resistance Shift
Terminal Strength	MIL-STD-202 Method 211 Test Condition "A" 3lbs. Test Condition "B" 5 bends	No Significant Abnormality (Visual)
Solderability (Lead only)	MIL-STD-202 Method 208 Test C	>95% Covered
High Temperature Storage	125°C ±2°C for 500 Hours	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)
Thermal Shock	-5°C to +150°C 30 Minutes Dwell, 5 Cycles	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)

Barry Industries reserves the right to change part number and/or process without notification.

