




WWW.BARRYIND.COM

RP2010ZZ-XXXXWN-YY


CHIP RESISTOR

Features:

- ◆ Alumina or BeO Material
- ◆ Wrap around
- ◆ .5 to 1 Mohm

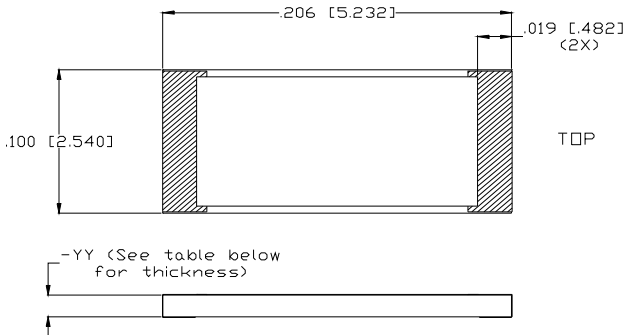

-YY (See table below for thickness)

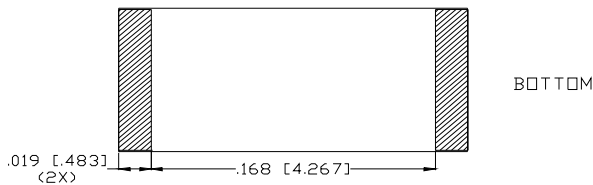

Dimensions in inches
Tolerance +/- .005 [.127]
unless otherwise stated


General Description:

The RP2010ZZ-XXXXWN-YY is a 50 ohm standard wrap around style chip resistor (.5 - 1Mohm available). Its compact size is ideal for miniature electronic components.



** See below for ordering options*

Temperature Coefficient:

$\pm 250\text{PPM}/^\circ\text{C}$ from -55°C to $+150^\circ\text{C}$
(Standard)

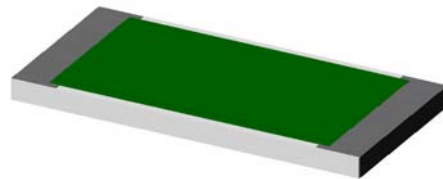

DERATING CURVE:

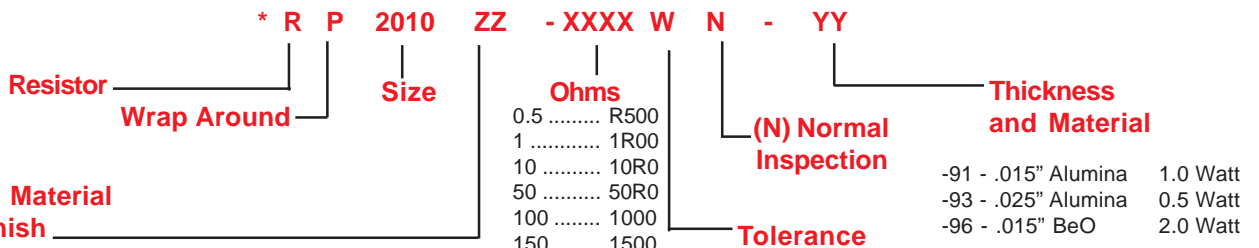

Ohms	Tolerance	Thickness and Material	Power
0.5 R500		-91 - .015" Alumina	1.0 Watt
1 1R00		-93 - .025" Alumina	0.5 Watt
10 10R0		-96 - .015" BeO	2.0 Watt
50 50R0			
100 1000			
150 1500			
1K 1001			
10K 1002	F - 1%		
100K 1003	G - 2%		
470K 4703	J - 5%		
	K - 10%		
	L - 20%		
	X = Special		

- AS** - Available on Alumina & BeO:
Tin Lead over Platinum Palladium Gold, Solder Mount, **NOT RoHS**
- BA** - Available on Alumina:
Palladium Silver, Epoxy Mount, **RoHS Compliant**
- CB** - Available on Alumina & BeO:
Tin Lead over Nickel over Silver, Solder Mount, **NOT RoHS**
- CT** - Available on Alumina & BeO:
Matte Tin Lead over Nickel over Silver, Solder Mount, **RoHS Compliant**
- GA** - Available on Alumina:
Gold, Epoxy Mount, Wire Bond, **RoHS Compliant**
- JA** - Available on BeO:
Gold over Platinum Palladium Gold, Epoxy Mount, Wire Bond, **RoHS Compliant**

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com
Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
03/05/12	03/05/12	-