


RP0603ZZ-XXXXWN-2S Features:


- Wraparound Terminals
- Solder or Epoxy Attachment
- Custom Defined Testing Available
- RoHS Compliant or SnPb Available
- Tape and Reel or Waffle Pack Available
- (Standard is bulk)

RP0603ZZ-XXXXWN-2S Parameters:


Resistance Range: 10Ω - 1KΩ
 Rated Power: 1.5W*
 Resistor Construction: Thick Film on AIN



RP0603ZZ-XXXXWN-2S Dimensions:

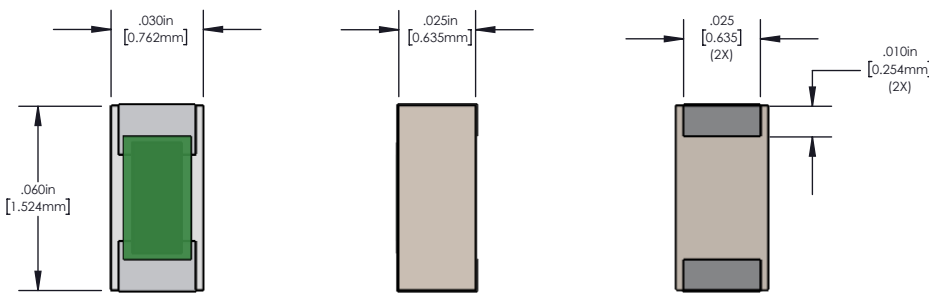

RP0603ZZ-XXXXWN-2S Power Derating Curve

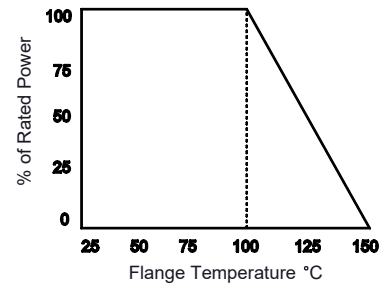

Can be mounted in either direction
 *Rating based on ≤100°C constant baseplate temperature

Ordering Information:

RP	0603	ZZ	-	XXXX	W	N	-	2S
Prefix for Wraparound Resistor	Size 0603	Value Code		Tolerance	(N)ormal Inspection Contact factory for additional options	Substrate 2S - .025" AIN		
		10R0 - 10Ω		F - 1%				
		1000 - 100Ω		G - 2%				
		1001 - 1KΩ		J - 5%				
Terminal Metallization	RoHS	Magnetic		Solder	Epoxy	Wirebond		
BA - Palladium Silver	Yes	No		No	Yes	No		
BS - SnPb over Palladium Silver	No	No		Yes	No	No		
CT - 100% Matt Tin over Nickel over Silver	Yes	Yes		Yes	No	No		
CB - SnPb over Nickel over Silver	No	Yes		Yes	No	No		
GA - Gold	Yes	No		No	Yes	Yes		

Barry Industries reserves the right to change part number and/or process without notification.