


### RYC1206ZZ-XXXXWN-2S Features:

- Wraparound w/ Isolated Center Pad Configuration
- Solder Attachment
- Customer Defined Testing Available
- RoHS or SnPb Available
- Tape & Reel or Waffle Pack Available (Standard is bulk)




### RYC1206ZZ-XXXXWN-2S Parameters:

Resistance Range:	10Ω - 1KΩ
Rated Power:	10W*
Construction:	Thick Film on AIN
Operating Temperature:	-55 to +150°C


\* Rating based on ≤100°C constant baseplate temperature

Actual Size

### RYC1206ZZ-XXXXWN-2S Power Derating Curve

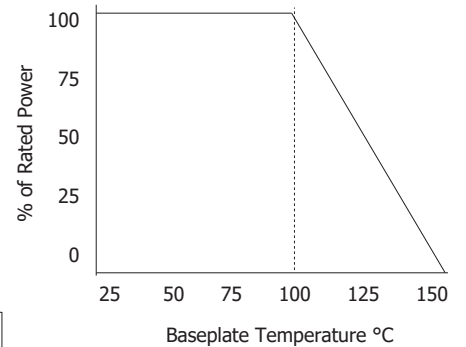

### RYC1206ZZ-XXXXWN-2S Dimensions:

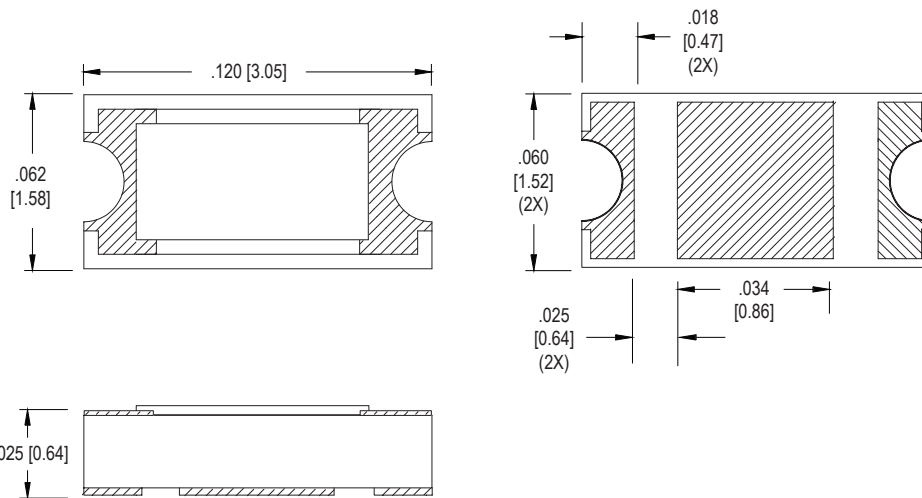

Dimensions in inches [mm]  
Tolerance is ± 0.005 [0.127]  
unless otherwise stated

### Ordering Information:

<b>RYC</b>	<b>1206</b>	<b>ZZ</b>	<b>-</b>	<b>XXXX</b>	<b>W</b>	<b>N</b>	<b>-</b>	<b>2S</b>	<b>UU</b>
Prefix for Wraparound Resistor w/ Isolated Backpad	Size			Value Code Examples	Tolerance	Normal Inspection Contact factory for additional options		Substrate	Packaging
	1206			10R0 - 10Ω    1500 - 150Ω 50R0 - 50Ω    5000 - 500Ω 1000 - 100Ω    1001 - 1KΩ	F - 1% G - 2% J - 5%		2S - 0.025" AIN	Blank - Bulk TR - Tape and Reel WP - Waffle Pack	

Terminal Metallization	RoHS	Magnetic	Solder	Epoxy	Wirebond
CT - 100% Matte Tin over Nickel over Silver	Yes	Yes	Yes	No	No
CB - Sn62 over Nickel over Silver	No	Yes	Yes	No	No

Barry Industries reserves the right to change part number and/or process without notification.

**RYC1206ZZ-XXXXWN-2S Reliability Specifications:**

Parameter:	Test Condition:	Results:
Short Time Overload	Apply 1.1x Rated Power for 5 Seconds.	≤ 5.0% Resistance Shift
Rated Load Life	Apply 1/2 Power Under 40°C ±2°C 90 Minutes on/ 30 Minutes off. Repeat for 100 hours	≤ 5.0% Resistance Shift
Moisture Resistance	MIL-PRF-55342 para 4.8.9 95% RH, 25°C - 65°C	≤ 5.0% Resistance Shift
Resistance to Soldering Heat	MIL-STD-202 Method 210 and MIL-PRF-55342 Para 4.8.8.1	≤ 5.0% Resistance Shift
Resistance to Bonding Exposure	MIL-PRF-55342 Para 4.8.8.2	≤ 5.0% Resistance Shift
Solderability	MIL-PRF-55342 Para 4.8.12	>95% Covered
High Temperature Storage	125°C ±2°C for 500 Hours	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)
Thermal Shock	-65°C to +150°C 30 Minutes Dwell, 5 Cycles	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)

Barry Industries reserves the right to change part number and/or process without notification.