


### RYC1206ZZ-XXXXWN-93 Features:

- Wraparound w/ Isolated Center Pad Configuration
- Solder Attachment
- Customer Defined Testing Available
- RoHS or SnPb Available
- Tape & Reel or Waffle Pack Available (Standard is bulk)




### RYC1206ZZ-XXXXWN-93 Parameters:


Resistance Range:	0.5Ω - 1MΩ
Rated Power:	5W*
Construction:	Thick Film on Al <sub>2</sub> O <sub>3</sub>
Operating Temperature:	-55 to +150°C

\* Rating based on ≤100°C constant baseplate temperature

### RYC1206ZZ-XXXXWN-93 Dimensions:

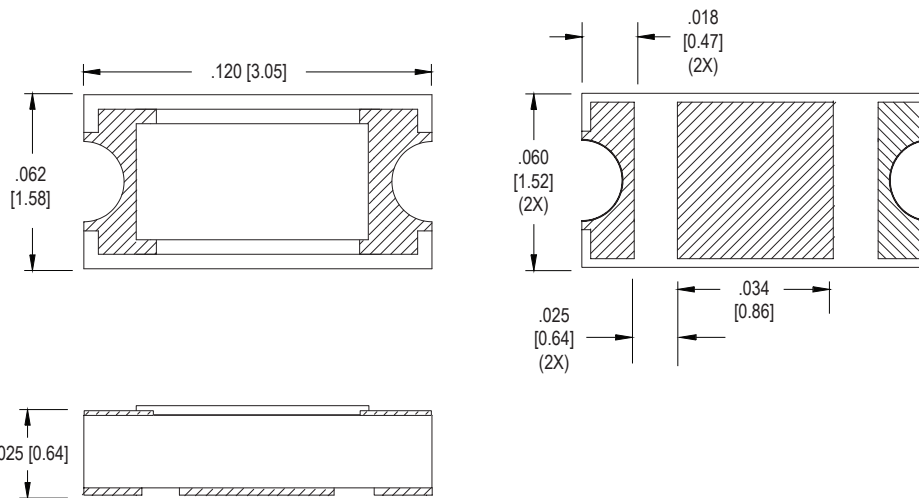

### RYC1206ZZ-XXXXWN-93 Power Derating Curve

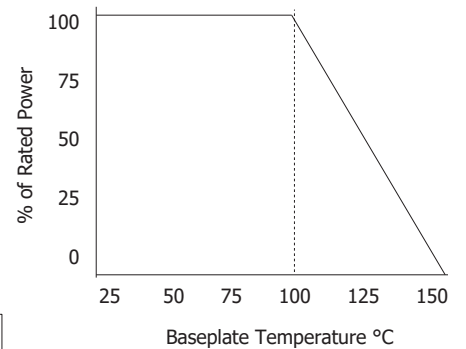

Dimensions in inches [mm]  
Tolerance is ± 0.005 [0.127]  
unless otherwise stated

### Ordering Information:

<b>RYC</b>	<b>1206</b>	<b>ZZ</b>	<b>-</b>	<b>XXXX</b>	<b>W</b>	<b>N</b>	<b>-</b>	<b>93</b>	<b>UU</b>
Prefix for Wraparound Resistor w/ Isolated Backpad	Size			Value Code Examples	Tolerance	Normal Inspection Contact factory for additional options		Substrate	Packaging
	1206			R500 - 0.5Ω 50R0 - 50Ω 1000 - 100Ω 1001 - 1KΩ 1002 - 10KΩ 1003 - 100KΩ 1004 - 1MΩ	F - 1% G - 2% J - 5%		93 - 0.025" Al <sub>2</sub> O <sub>3</sub>	Blank - Bulk TR - Tape and Reel WP - Waffle Pack	

#### Terminal Metallization

CT -	100% Matte Tin over Nickel over Silver
CB -	Sn62 over Nickel over Silver

#### RoHS

Yes
No

#### Magnetic

Yes
Yes

#### Solder

Yes
Yes

#### Epoxy

No
No

#### Wirebond

No
No

Barry Industries reserves the right to change part number and/or process without notification.

**RYC1206ZZ-XXXXWN-93 Reliability Specifications:**

Parameter:	Test Condition:	Results:
Short Time Overload	Apply 1.1x Rated Power for 5 Seconds.	≤ 5.0% Resistance Shift
Rated Load Life	Apply 1/2 Power Under 40°C ±2°C 90 Minutes on/ 30 Minutes off. Repeat for 100 hours	≤ 5.0% Resistance Shift
Moisture Resistance	MIL-PRF-55342 para 4.8.9 95% RH, 25°C - 65°C	≤ 5.0% Resistance Shift
Resistance to Soldering Heat	MIL-STD-202 Method 210 and MIL-PRF-55342 Para 4.8.8.1	≤ 5.0% Resistance Shift
Resistance to Bonding Exposure	MIL-PRF-55342 Para 4.8.8.2	≤ 5.0% Resistance Shift
Solderability	MIL-PRF-55342 Para 4.8.12	>95% Covered
High Temperature Storage	125°C ±2°C for 500 Hours	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)
Thermal Shock	-65°C to +150°C 30 Minutes Dwell, 5 Cycles	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)

Barry Industries reserves the right to change part number and/or process without notification.