



WWW.BARRYIND.COM

H05Z-1000J99-00C36-X




BeO 10 dB LEADED ATTENUATOR

Features:

- ◆ BeO Material
- ◆ DC - 4 GHz Performance
- ◆ 150 Watt Input Power

General Description:


The H05Z-1000J99-00C36-X is a leaded 10 dB, BeO attenuator. It has an input power rating of 150 watts, while maintaining a constant mounting surface temperature of 100°C. It offers a frequency range from DC to 4 GHz.

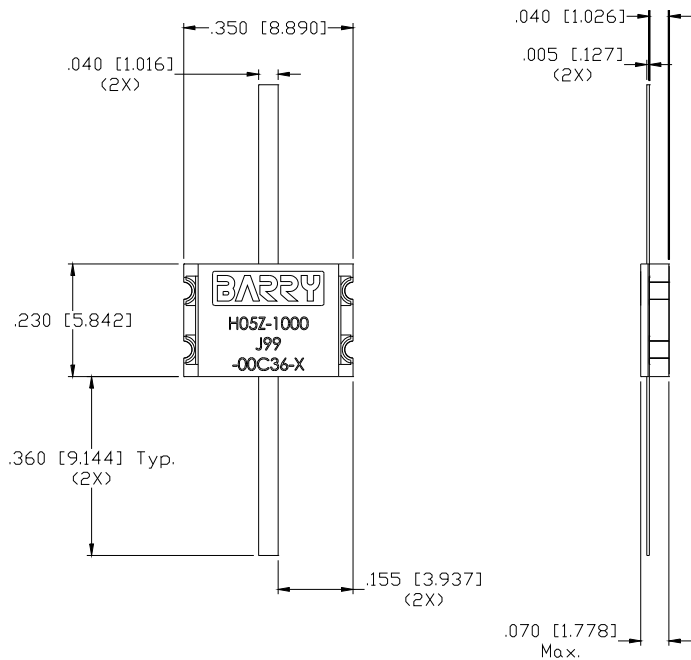

Dimensions in inches [mm]
Tolerance $\pm .010$ [.254]
unless otherwise stated



DERATING CURVE:

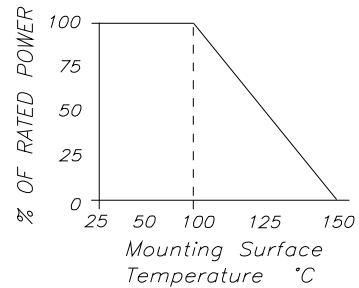

Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		4	GHz
Input Power			150	Watts
Input Return Loss	17			dB
Output Return Loss	17			dB
Mounting Surface Temperature			100 150 (0% Power)	°C
Attenuation	9	10	11	dB

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
06/06/11	06/06/11	-